

C5190

CMOS 25 MP

Quad CXP-6



Imperx: C5190

The C5190 features the ON Semiconductor Python NOIP1xx025KA CMOS image sensor with a native resolution of 5120 x 5120 in an APS-H optical format. The GenICam™ compliant camera delivers up to 80 frames per second in global shutter mode using a 4-channel CXP-6 CoaXPress® interface. CMOS technology eliminates smear columns from areas of ultra-bright intensity and specular reflections in uncontrolled lighting applications. The Imperx Cheetah line provides excellent image quality with Imperx proprietary processing. In addition, Imperx puts you in control and gives you full access to raw data without corrections. Using the simple, intuitive GenICam™ compliant user interface, you can quickly apply image corrections, if desired. The CXP-C5190's flexibility, image quality, and speed make it suitable for a broad range of diverse and demanding applications, but "one size doesn't fit all," and Imperx can help optimize the camera to your exact requirements.

Specifications


Feature	Description	Feature	Description
Output Interface	4-channel CXP-6 CoaXPress® w/PoCXP	Strobe Output	2 strobes, programmable position and duration
Resolution	5120 (H) x 5120 (V)	Pulse Generator	Yes, programmable
Sensor	Python NOIP1xx025KA, CMOS Color/Mono/ENIR	Data Corrections	2 LUTs pre-programmed with Gamma 0.45; Bad Pixel Correction (static), flat field correction, fixed pattern noise
Sensor Format	23 mm (H) x 23 mm (V) 32.5 mm diagonal APS-H optical format	Lens Mount	F-Mount (Default), M42, EF Canon (passive or active)
Pixel Size	4.5 microns square	Power over CoaXPress (PoCXP)	Yes
NIR Sensitivity	Mono: 850nm: 18%, 950nm: 6% ENIR: 850nm: 30%, 950nm: 11%	Power consumption	Typical: 10 W, Maximum: 10.5 W
Shutter	Global shutter (GS)	Size - Width/Height/Length	72.0 mm (W) x 72.0 mm (H) x 44.3 mm (L)
Fixed Pattern Noise	<0.9 LSB	Weight	379 g
Sensor Digitization	10-bit	Vibration, Shock	TBD
Frame Rate	80 fps (8-bit), 70 fps (10-bit)	Environmental	-40 °C to +70 °C Operating, -50 °C to +90 °C Storage
Dynamic Range	59 dB	Humidity	10% to 90% non-condensing
Row Overhead Time (ROT)	Zero	MTBF	>323,000 hours @ 40 °C (Telcordia SR-332)
Output Bit Depth	8, 10-bit	Military Standard	MIL-STD-810G
Analog Gain Control	1x, 1.26x, 1.87x, 3.17x	Regulatory	FCC Part 15 Class A, CE, RoHs
Digital Gain	1x (0dB) to 15.9 (24 dB) with a precision of 0.001x. (AGC available)		
AEC/AGC	Yes		
White Balance	Manual, Auto, Off		
Shutter Speed	1 µs/step, 40 µs to 1.0 sec		
Exposure Control	Off, Internal, External. (AEC available)		
Regions of Interest (ROI)	1 ROI		
Averaging Decimation	1 x 2, 2 x 1, 2 x 2		
Sub-sampling	1 x 2, 2 x 1, 2 x 2		
Trigger Inputs	External, Pulse generator, Software		
Trigger Options	Edge, Debounce		
Trigger Modes	Trigger over CoaXpress, Internal, External, Software		
External Inputs/Outputs	2 IN (OPTO, LVTTTL) / 2 OUT (OPTO, TTL)		

Imperx: C5190 Applications


The C5190 incorporates a number of unique features tailored to reduce system complexity, maximize interface bandwidth, and expand the usable operational range.

Aerospace • Surveillance • Ball Grid Array • Printed Circuit Board Inspection • Motion Analysis • Machine Vision • Industrial Inspection • Intelligent Traffic Systems • Aerial Imaging • Open Road Tolling Systems

Absolute Quantum Efficiency

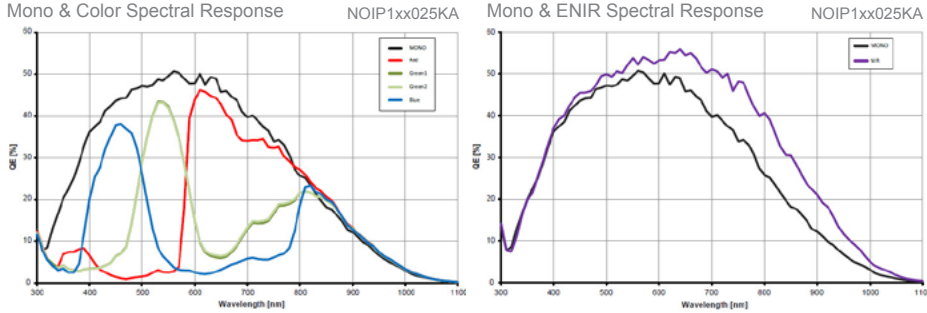

Dimensions

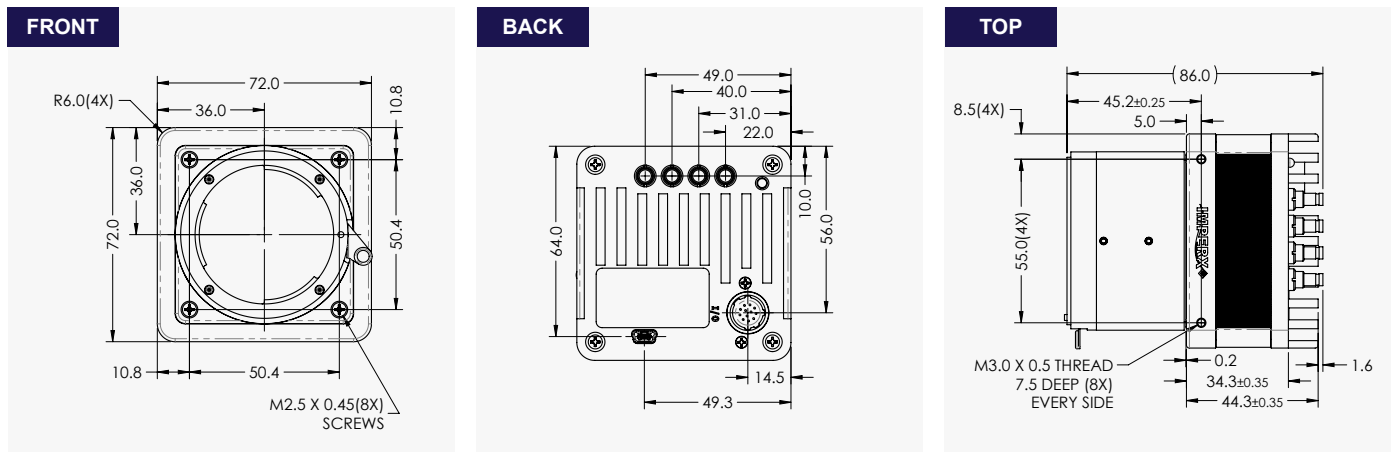


Ordering Information

Output Interface	4-channel CXP-6 CoaXPress® w/PoCXP
Sensor Types available	<ul style="list-style-type: none"> Monochrome Bayer Color NIR

Lens Mounts	<ul style="list-style-type: none"> F-Mount (Default) M42 (Optional) EF Canon (Optional)
Accessories (Sold separately)	CBL-PWIO01: Cable Power; Hirose 12p (F) to loose end; 2 meters

Gen<I>Cam Compliant Camera Configurator

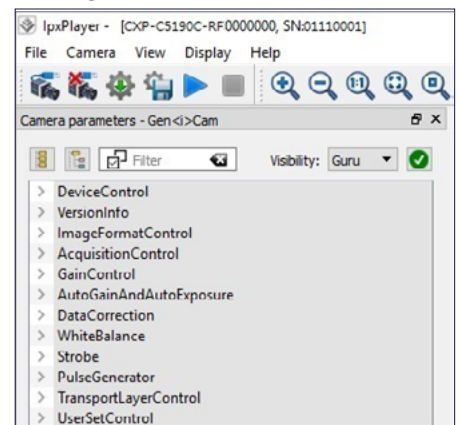

Hirose Connectors

I/O Interface	Pin	Signal
	1	Reserved
	2	Reserved
	3	Reserved
	4	Reserved
	5	OUT2 OPTO -
	6	OUT1 TTL Gnd
	7	OUT1 TTL Signal
	8	IN1 OPTO +
	9	IN2 TTL Signal
	10	IN1 OPTO -
	11	IN2 TTL Gnd
	12	OUT2 OPTO +

Rev: cxp_c5190_r3_2019

Quality Management System ISO 9001:2015 Registered
 Environmental Management System ISO 14001:2015 Registered
 DDTC Registered (Directorate of Defense Trade Controls, US Department of State)



SAIS Espace BOAT 2 route de Gasville 28630
 NOGENT LE PHAYE
 Tel : 09 54 16 23 53 Fax : 09 59 16 23 53
 contact@sacasa.info - www.sacasa.info
 www.imperx-camera.fr

Technical data has been fully checked, but accuracy of printed matter is not guaranteed. Subject to change without notice. Copyright 2019.